


BRUSHING MACHINE

HA-400 FOR ORGANIC SEED

HA1.01.2001.GB

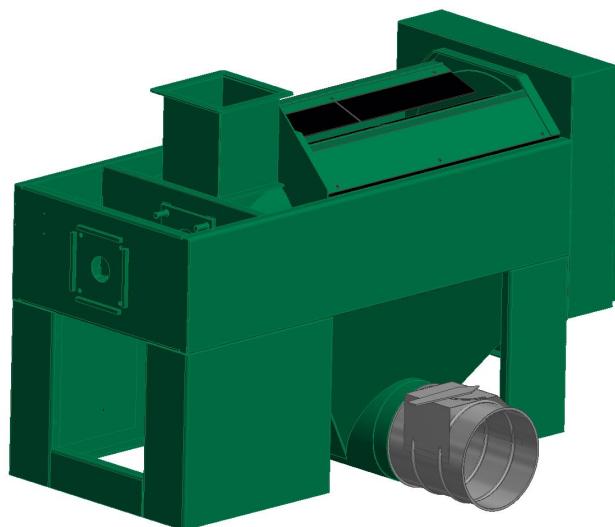

The HA-400 brushing machine in this construction is very suitable for organic seed.

The brushing machine is also very suitable for research stations as well as where relatively small lots of expensive seeds are processed; it can also be used for granules and powder products.

For capacity and all other specific information see the back page.

The HA-400 brushing machine offers the below features:

- Inlet with screw.
- One-section exchangeable mantle with square wire mesh.

- Rotor with internally adjustable nylon brushes.
- V-belt drive and motor.
- Air inlet from top of the unit.
- Two outlets; product outlet with rotary air valve and outlet for removed product at the bottom.
- Connection at the bottom of the machine for external aspiration; 3 kW fan included.

The machine is of steel construction.

Options:

- Various kinds of brushes and steel beaters
- Motor 4 kW [instead of standard 3 kW]
- Frequency converter [supplied separately for customer installation]

EQUIPPED FOR CHANGE

We provide valuable insights, so you can make qualified decisions

BRUSHING MACHINE HA-400 FOR ORGANIC SEED

TECHNICAL SPECIFICATIONS:

	HA-400
Mantle: dia. x length mm	400 x 800
Nylon brushes (0.9 mm) pcs.	6
Motor kW	3
Capacity t/h	0.5

Capacity: based on pre-cleaned rye grass.

DISTINGUISHING ADVANTAGES:

- Inlet with screw ensuring a controlled feed also of very tangled products
- Rotor with many types of brushes or beaters ensuring a highly efficient brushing of a wide range of products
- Adjustable end outlet for precise regulation of the brushing degree
- Easy clean-down when changing from one product to another
- Low maintenance costs

